


## WIRING DIAGRAM

Model: MHWW-24-H-1

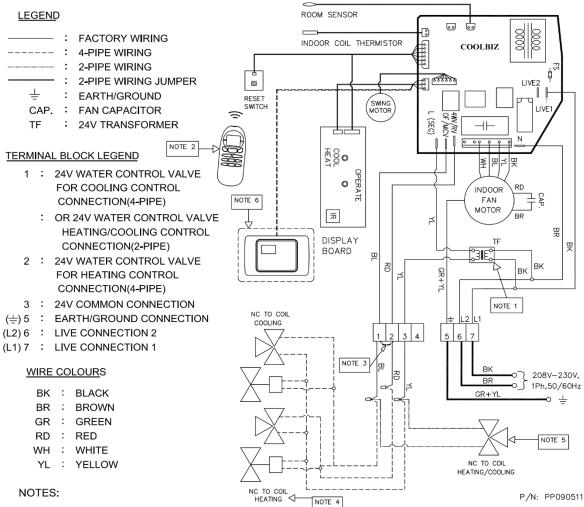

- 1. 208/230V 24Vac TRANSFORMER
- 2. WIRELESS REMOTE INCLUDES A WALL MOUNTING BRACKET
- 3. JUMPER MUST BE FIELD INSTALLED FOR 2-PIPE HEAT/COOL OPERATION
- 4. 4-PIPE WIRING AND VALVE CONFIGURATION
- 5. 2-PIPE WIRING AND VALVE CONFIGURATION
- 6. WIRED REMOTE UNIT, OPTIONAL
- 7. THE FIELD WIRING CONDUCTOR OF HIGH AND LOW VOLTAGE CIRCUIT SHALL BE SEPARATELY FIXED FIRMLY BY EACH CLAMP.
- 8. ALL WIRING SHALL BE DONE ACCORDING TO NATIONAL AND LOCAL CODE REQUIREMENTS.
- 9. A LINE OF SIGHT SERVICE DISCONNECT MUST BE PROVIDED AS A MEANS TO TURN OFF POWER FOR SERVICING.

12)



## MHWW-24-H-1 Dimensional Drawing

